



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
26.11.1997 Bulletin 1997/48

(51) Int Cl.⁶: **H02M 3/28, H02J 1/10**

(21) Application number: 97303253.5

(22) Date of filing: 13.05.1997

(84) Designated Contracting States:
DE FR GB

(30) Priority: 24.05.1996 US 655334

(71) Applicant: **LUCENT TECHNOLOGIES INC.**
Murray Hill, New Jersey 07974-0636 (US)

(72) Inventors:
• **Brooke, John Christopher**
Dallas, Texas 75244 (US)

- **Thottuvelil, Vijayan Joseph**
Plano, Texas 75023 (US)
- **Lanzone, Chris Allan**
Mesquite, Texas 75150 (US)


(74) Representative:
Buckley, Christopher Simon Thirsk et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green, Essex IG8 0TU (GB)

(54) **Control system for a modular power supply and method of operation thereof**

(57) In a modular power supply having a plurality of module slots capable of receiving power supply modules (PS₁...PS_N) therein, a system and method for controlling the power supply modules to regulate an overall output characteristic of the modular power supply, includes: (1) an overall control circuit (CONTROLLER) for sensing an overall output characteristic (VL) of the modular power supply and developing therefrom an overall error signal (V_e) representing a deviation of the overall output characteristic from a reference characteristic

(V_{DPV}) and (2) a separate module control circuit (B_j, K_j, M_j) for each of the power supply modules, each separate module control circuit sensing an output characteristic (I_j) of an associated power supply module and developing therefrom and from the overall error signal a regulating signal (V_{cj}) for the associated power supply module, the regulating signal controlling the output characteristic of the associated power supply module to control the overall output characteristic of the modular power supply.

FIG. 2

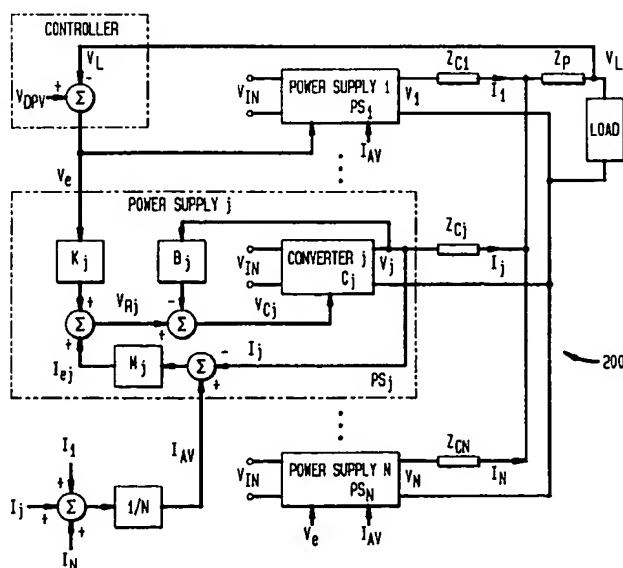

Description

Technical Field of the Invention

The present invention is directed, in general, to modular power supplies and, more specifically, to a control system that regulates an output and simultaneously sustains load sharing among power supply modules of the modular power supply.

Background of the Invention

It is not uncommon to find a power supply having a plurality of slots for receiving individual power supply modules. The modular architecture provides several advantages, including, an increase in the level of power that may be delivered to a load and an increase in the overall reliability of the power supply by sharing the load requirements among a plurality of redundant power supply modules. Additionally, the modular architecture enhances the flexibility of the power supply by allowing individual modules to be replaced to accommodate changes in the power supply requirements. Finally, the modular architecture provides a robust system whereby failed modules can be rapidly replaced with replacement modules.

Conventionally, the power supply may employ multiple converters in separate modules that convert an AC or DC input voltage to a DC output voltage. Again, the power supply may employ multiple converters in separate modules to increase the overall capacity and reliability of the power supply. The converters, in such a system, share the load to, among other things, evenly distribute stresses among the separate modules, while providing a regulated output to the load. Also, when a failure occurs in a modular system, it is possible to identify and shut down the failed unit without affecting the other parallel connected units, thereby minimizing the overall effects on the output of the power supply. While uniform power distribution or load sharing may be a goal of parallel converters in the modular power supply, several factors contribute to non-uniform distribution. For instance, as component tolerances and the characteristics of the components change due to uneven aging and different physical conditions, the power distribution therefrom also changes. Therefore, efforts should be made to adequately control the modules to regulate the output of the power supply and compensate for individual variations in the power supply modules.

There are a number of alternatives well known in the prior art that attempt to achieve load sharing among parallel modules in a modular power supply. One of the simplest methods for load sharing is commonly referred to as the droop method. The droop method is an open-loop technique that programs the output impedance of the power supply modules to attain load sharing. A disadvantage of this type of technique is that there is poor regulation of the output voltage of the power supply. In

addition, while this method obtains relatively acceptable load sharing at higher currents, at lower currents the droop method exhibits poor load sharing leading to large current imbalances between power supply modules.

A second alternative is to select a master module to perform voltage control at the output of the power supply and force the remaining modules (i.e., slaves) to act as current sources. Since an error voltage is proportional to the load current, this alternative generally employs current-mode control. If the modules are similar in design then a given error voltage at the output, or error amplitude, will compel the modules to source the same load current. A major deficiency with the master/slave option is that if the master fails, the entire system is disabled thereby defeating the redundancy of the modular power supply.

Another conventional method is a current sharing technique referred to as central limit control ("CLC"). The CLC design requires that the parallel modules regulate the voltage across the shared load and the voltage feedback loops of the modules sense the load voltage. As a result, the CLC provides voltage regulation at the output of the power supply and current sharing among the modules. There are several variations of this method including CLC with common voltage feedback and fixed reference voltage. Under this approach, the common output voltage across the shared load is regulated to a fixed reference through identical voltage error compensators. The operating control voltage that feeds the driver of each module is compensated by a corresponding error signal to produce current sharing among the power supply modules. While this alternative provides adequate load sharing for identical power supply modules, it cannot adequately compensate for variations in the individual power supply modules (e.g., variations in tolerances) due to the non-identical compensators employed therein.

Accordingly, what is needed in the art is a control system for a modular power supply that maintains a well regulated output and employs current sharing among the power supply modules, while compensating for variations in the performance and tolerances of the individual power supply modules.

Summary of the Invention

To address the above-discussed deficiencies of the prior art, the present invention provides, in a modular power supply having a plurality of module slots capable of receiving power supply modules therein, a system and method for controlling the power supply modules to regulate an overall output characteristic of the modular power supply.

The system includes: (1) an overall control circuit for sensing the overall output characteristic of the modular power supply and developing therefrom an overall error signal representing a deviation of the overall output characteristic from a reference characteristic and (2) a

separate module control circuit for each of the power supply modules, each separate module control circuit sensing an output characteristic of an associated power supply module and developing therefrom and from the overall error signal a regulating signal for the associated power supply module. The regulating signal controls the output characteristic of the associated power supply module to control the overall output characteristic of the modular power supply.

The system of the present invention provides precise regulation of the overall output characteristic of the modular power supply, while concurrently maintaining load sharing among the power supply modules of the power supply. The system attains this higher level of regulation by employing both system-wide and individual modular control. The overall control circuit develops the overall or common error signal that the module control circuits employ, in conjunction with an output characteristic of the individual module, to develop a regulating signal that controls the output of each power supply module. By selecting the gain of the compensation circuits to adequately amplify the common error signal, the output characteristic can be regulated to track the reference characteristic very closely. The system performance can be achieved despite changes in the load, errors in sensing the output characteristic of any particular power supply module, variations in the tolerances of the power supply components or variations in the gains of the compensation circuits employed in the power supply.

In an alternative embodiment of the present invention, the separate module control circuit senses an output current of the associated power supply module and develops therefrom a current error signal representing a deviation from an average of output currents of the power supply modules. The separate module control circuit combines the current error signal with the overall error signal to further develop the regulating signal. In a related, but alternative embodiment of the present invention, the separate module control circuit senses an actual output current of the associated power supply module and develops therefrom a current error signal representing a deviation of a ratio of the actual output current to a maximum output current of the associated power supply module from a ratio of an actual output current of the modular power supply to a maximum output current of the modular power supply. Again, the separate module control circuit combines the current error signal with the overall error signal to further develop said regulating signal. The system of the present invention is compatible with a modular power supply employing non-identical power supply modules (e.g., the power supply modules have varying maximum current carrying capability). In either embodiment, the separate module control circuit derives the regulating signal from the output characteristic of the associated power supply module, the overall error signal and the current error signal.

In an alternative embodiment of the present inven-

tion, the separate module control circuit develops the regulating signal from a second characteristic reference signal of the associated power supply module. The regulating signal is derived with the addition of the second characteristic reference thereby increasing the reliability of the overall system. For instance, if the common error signal is interrupted, the power supply modules may still develop the regulating signal to control an output therefrom and the overall output characteristic of the power supply.

In an alternative embodiment of the present invention, the separate module control circuit develops the regulating signal directly from the overall output characteristic. By developing the regulating signal from the overall output characteristic, the reliability of the system is enhanced to accommodate unforeseen conditions such as when the common error signal is interrupted.

In an alternative embodiment of the present invention, the system includes: (1) a first sample and hold circuit for receiving and temporarily storing the overall output characteristic, the overall control circuit developing therefrom a sampled overall error signal, (2) a second sample and hold circuit for receiving and temporarily storing an output current of the associated power supply module, the separate module control circuit developing therefrom a sampled current error signal representing a deviation from an average of output currents of the power supply modules and (3) an accumulator, associated with the separate module control circuit, for generating an intermediate regulating signal from the sampled overall error signal and said sampled current error signal. In a related, but alternative embodiment of the present invention, the sampled current error signal represents a deviation of a ratio of an actual output current to a maximum output current of the associated power supply module from a ratio of an actual output current of the modular power supply to a maximum output current of the modular power supply. In either case, the intermediate regulating signal is derived from an accumulated and sampled overall error signal and current error signal. The present embodiments provide several advantages, namely, the capability to more precisely regulate the overall output characteristic of the modular power supply and the ability to maintain the regulating signal at the last known value in the event of a failure of the overall control circuit.

In an alternative embodiment of the present invention, the overall output characteristic is a function of an output voltage of the modular power supply. One of ordinary skill in the pertinent art should understand that other electrical characteristics, such as, without limitation, an output current, may also serve as the overall output characteristic of the modular power supply.

Another aspect of the present invention is, for use in a modular power supply having a plurality of module slots capable of receiving power supply modules therein and an overall control circuit for sensing an overall output characteristic of the modular power supply and de-

veloping therefrom an overall error signal representing a deviation of the overall output characteristic from a reference characteristic, a power supply module, including: (1) power conversion circuitry and (2) a module control circuit constructed according to the principles of the present invention. One of ordinary skill in the pertinent art should understand that the power conversion circuitry includes any circuitry, such as, without limitation, a DC/DC power converter, that transforms one form of electrical power to another.

The foregoing has outlined, rather broadly, preferred and alternative features of the present invention so that those skilled in the art may better understand the detailed description of the invention that follows. Additional features of the invention will be described hereinafter that form the subject of the claims of the invention. Those skilled in the art should appreciate that they can readily use the disclosed conception and specific embodiment as a basis for designing or modifying other structures for carrying out the same purposes of the present invention. Those skilled in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the invention in its broadest form.

Brief Description of the Drawings

For a more complete understanding of the present invention, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

FIGURE 1 illustrates a prior art control system for a modular power supply;

FIGURE 2 illustrates a modular power supply employing one embodiment of a control system constructed according to the principles of the present invention;

FIGURE 3 illustrates the modular power supply of FIGURE 2 employing another embodiment of a control system constructed according to the principles of the present invention;

FIGURE 4 illustrates the modular power supply of FIGURE 2 employing yet another embodiment of a control system constructed according to the principles of the present invention;

FIGURE 5 illustrates the modular power supply of FIGURE 2 employing yet another embodiment of a control system constructed according to the principles of the present invention; and

FIGURE 6 illustrates the modular power supply of FIGURE 2 employing yet another embodiment of a control system constructed according to the principles of the present invention.

Detailed Description

Referring initially to FIGURE 1, illustrated is a prior

art control system for a modular power supply 100. The power supply 100 includes $\langle N \rangle$ power supply modules PS_1 to PS_N in parallel that deliver power to a common load LOAD. While the individual components of the power supply module PS_j are illustrated and the operation thereof will hereinafter be described, the principles are equally applicable to the other power supply modules PS_1 to PS_N employed by the modular power supply 100.

The power supply module PS_j is connected in series with an interconnection impedance Z_{cj} and a common interconnection impedance Z_p to the load LOAD. The load voltage V_L is sensed and sent to the power supply module PS_j . The output current I_j of the power supply module PS_j is compared with a signal equal to the average output current I_{AV} of all the power supplies PS_1 to PS_N ; a resulting error signal is processed by a compensation circuit represented by a control block M_j to yield a current error signal for the power supply module PS_j . The current error signal is added to the reference voltage V_{REFj} to create a voltage V_{Rj} . The voltage V_{Rj} is compared to the common fed back load voltage V_L , processed by a compensation circuit represented by a control block B_j , and the resulting voltage is used to control an output voltage V_j of the power supply module PS_j .

In this prior art control system, the power supply modules PS_1 to PS_N share the load current and the load voltage V_L is regulated at a level that is an average of the individual power supply module reference voltages. The dependence of the load voltage V_L on the average value of the individual power supply modules reference voltages makes precise regulation of the load voltage V_L very difficult. If the load voltage V_L needs to be adjusted, then the reference voltage of each power supply module PS_1 to PS_N must be adjusted via a manual iterative process until the desired level of the load voltage V_L is obtained and all of the power supply modules PS_1 to PS_N are delivering the same current. When the power supply modules PS_1 to PS_N are added or removed from the modular power supply 100, this manual iterative process must be repeated.

Turning now to FIGURE 2, illustrated is a modular power supply 200 employing one embodiment of a control system constructed according to the principles of the present invention. Analogous to the modular power supply 100 of FIGURE 1, the modular power supply 200 includes $\langle N \rangle$ power supply modules PS_1 to PS_N in parallel that deliver power to a common load LOAD. While the individual components of the power supply module PS_j are illustrated and the operation thereof will hereinafter be described, the principles are equally applicable to the other power supply modules PS_1 to PS_N employed by the modular power supply 200. The control system of the present invention includes an overall control circuit illustrated as the circuitry from the load LOAD through a controller CONTROLLER to a compensation circuit represented by a control box K_j . The control system of the present invention also includes a separate module control circuit (associated with each power sup-

ply module PS_1 to PS_N) illustrated as compensation circuits represented by control blocks K_j , B_j , M_j in the power supply module PS_j .

An overall output characteristic or load voltage V_L is sensed and compared to a reference characteristic or reference voltage V_{DPV} for the modular power supply 200 to generate an overall (or common) error signal or common error voltage V_e that is sent to the power supply modules PS_1 to PS_N . The output current I_j of the power supply module PS_j is sensed and compared to an average output current I_{AV} of the power supply modules PS_1 to PS_N and the resulting error signal is processed by the compensation circuit M_j to yield a current error signal I_{ej} . If the power supply modules PS_1 to PS_N have varying maximum current capabilities, the current error signal I_{ej} is derived representing a deviation of a ratio of the output current I_j to a maximum output current capability $I_{j(max)}$ of the power supply module PS_j from a ratio of an actual output current of the modular power supply 200 to a maximum output current of the modular power supply 200. In either case, the common error voltage V_e (where $V_e = V_L - V_{DPV}$) is processed by the compensation circuit K_j and the resulting signal is added to the current error signal I_{ej} to obtain the reference voltage V_{Rj} for a converter C_j (i.e., the power conversion circuitry). The converter C_j regulates an output characteristic or output voltage V_j such that the difference $V_{Rj} - B_j V_j$ is approximately zero. The output voltage V_j (processed by the compensation circuit B_j) combined with the reference voltage V_{Rj} provides a regulating signal V_{Cj} to control the converter C_j to ultimately more precisely regulate the load voltage V_L . By adjusting the gains of the compensation circuit K_j to be relatively large, the load voltage V_L is approximately equal to the common reference voltage V_{DPV} . Therefore, only the reference voltage V_{DPV} need be adjusted to regulate the load voltage V_L thereby avoiding the manual iterative process of the prior art.

Turning now to FIGURE 3, illustrated is the modular power supply 200 of FIGURE 2 employing another embodiment of a control system constructed according to the principles of the present invention. Again, the power supply 200 includes $\langle N \rangle$ power supply modules PS_1 to PS_N in parallel that deliver power to a common load LOAD. While the individual components of the power supply module PS_j are illustrated and the operation thereof will hereinafter be described, the principles are equally applicable to the other power supply modules PS_1 to PS_N employed by the modular power supply 200. The control system of the present invention includes the overall control circuit and separate module control circuit (associated with each power supply module PS_1 to PS_N) as described with respect to FIGURE 2.

The control system further includes a second characteristic reference or an additional reference voltage V_{REFj} for the power supply modules PS_1 to PS_N . The reference voltage V_{REFj} is added to the common error voltage V_e and the current error signal I_{ej} to obtain the

reference voltage V_{Rj} for the converter C_j . Again, the converter C_j regulates its output voltage V_j so that the difference $V_{Rj} - B_j V_j$ is approximately zero. The output voltage V_j (processed by the compensation circuit B_j) is also combined with the reference voltage V_{Rj} to provide a regulating signal V_{Cj} to control the converter C_j to ultimately more precisely regulate the load voltage V_L . Analogous to the control system of FIGURE 2, by adjusting the gain of the compensation circuit K_j to be relatively large, the load voltage V_L is approximately equal to the common reference voltage V_{DPV} thereby providing the advantages as described with respect to FIGURE 2. An additional advantage of the present embodiment is the added reliability provided with the second characteristic reference V_{REFj} . Simply stated, if the common error voltage V_e signal is interrupted, the load voltage V_L will still be sufficiently regulated to an average output voltage of the power supply modules PS_1 to PS_N less the voltage drops in the impedances Z_{Cj} and Z_j . This feature provides additional reliability for the power supply 200 while maintaining current sharing between the power supply modules PS_1 to PS_N .

Turning now to FIGURE 4, illustrated is the modular power supply 200 of FIGURE 2 employing yet another embodiment of a control system constructed according to the principles of the present invention. Again, the power supply 200 includes $\langle N \rangle$ power supply modules PS_1 to PS_N in parallel that deliver power to a common load LOAD. While the individual components of the power supply module PS_j are illustrated and the operation thereof will hereinafter be described, the principles are equally applicable to the other power supply modules PS_1 to PS_N employed by the modular power supply 200. The control system of the present invention includes the overall control circuit and separate module control circuit (associated with each power supply module PS_1 to PS_N) as described with respect to FIGURE 2.

For purposes of the present embodiment, the load voltage V_L is fed back to the compensation circuit B_j of the power supply module PS_j instead of the output voltage V_j as illustrated with respect to FIGURES 2 and 3. The control system, therefore, improves regulation of the load voltage V_L at the load LOAD when the common error voltage V_e signal is interrupted. Under such circumstances, the load voltage V_L is regulated at a level corresponding to an average of the power supply module PS_1 to PS_N ; also, the voltage drops in the impedances Z_{Cj} and Z_P are effectively removed from the loop thereby further improving the regulation of the load voltage V_L .

Turning now to FIGURE 5, illustrated is the modular power supply 200 of FIGURE 2 employing yet another embodiment of a control system constructed according to the principles of the present invention. Again, the power supply 200 includes $\langle N \rangle$ power supply modules PS_1 to PS_N in parallel that deliver power to a common load LOAD. While the individual components of the power supply module PS_j are illustrated and the operation

thereof will hereinafter be described, the principles are equally applicable to the other power supply modules PS_1 to PS_N employed by the modular power supply 200. The control system of the present invention includes the overall control circuit and separate module control circuit (associated with each power supply module PS_1 to PS_N) as described with respect to FIGURE 2. The control system, as illustrated in the present embodiment, also includes (1) a first sample and hold circuit contained in an Analog-to-Digital ("A/D") converter, (2) an accumulator illustrated as a compensation circuit represented by a control box z^{-1} and (3) a second sample and hold circuit contained in the controller CONTROLLER.

The load voltage V_L is sampled and converted to a digital signal through an Analog-to-Digital ("A/D") converter. The digitized load voltage $V_L(n-1)$ is subtracted from the common reference value V_{DPV} and the resulting common error voltage $V_e(n-1)$ is sent to the power supply modules PS_1 to PS_N periodically. In addition, the output currents $I_j(n-1)$ to $I_N(n-1)$ from the power supply modules PS_1 to PS_N , respectively, are periodically digitized and an average value $I_{AV}(n-1)$ is computed and sent to the power supply modules PS_1 to PS_N periodically. The power supply module PS_j , for instance, then derives a current error signal $I_{ej}(n-1)$ by processing the difference between the average current $I_{AV}(n-1)$ and the output current $I_j(n-1)$ of the power supply module PS_j via the compensation circuit M_j . The $(n-1)$ sample of the power supply module's reference voltage or intermediate regulating signal $V_{Rj}(n-1)$ is obtained through the following equation:

$$V_{Rj}(n) = V_{Rj}(n-1) + K_j[V_{DPV} - V_L(n-1)] + M_j[I_{AV}(n-1) - I_j(n-1)]$$

The voltage $V_{Rj}(n-1)$ serves as a reference that the voltage $V_j(n-1)$ is regulated to through the power supply module PS_j . Again, the load voltage V_L is precisely regulated to the desired level V_{DPV} and the power supply modules PS_1 to PS_N share the load LOAD. The control system of the present embodiment demonstrates improved noise immunity in the transmission of the common error voltage V_e and the average current I_{AV} because of the digital transmission of the signals in the power supply 200. Additionally, the reference voltage $V_{Rj}(n)$ of the power supply module PS_j is stored in digital memory thereby increasing the reliability of the power supply 200 in the event that the common error voltage V_e or the average current I_{AV} is interrupted. Under these circumstances, the power supply module PS_j may employ the last stored value of the reference voltage $V_{Rj}(n-1)$ to regulate the output voltage $V_j(n-1)$ of the converter C_j and to maintain the load voltage V_L at the desired level. Also, the power supply modules PS_1 to PS_N maintain current sharing provided that the load current remains relatively constant and the control parameters

of the power supply modules PS_1 to PS_N do not drift appreciably.

Turning now to FIGURE 6, illustrated is the modular power supply 200 of FIGURE 2 employing yet another embodiment of a control system constructed according to the principles of the present invention. Again, the power supply 200 includes $<N>$ power supply modules PS_1 to PS_N in parallel that deliver power to a common load LOAD. While the individual components of the power supply module PS_j are illustrated and the operation thereof will hereinafter be described, the principles are equally applicable to the other power supply modules PS_1 to PS_N employed by the modular power supply 200. The control system of the present invention includes the overall control circuit and separate module control circuit (associated with each power supply module PS_1 to PS_N) as described with respect to FIGURE 2.

In the illustrated embodiment, the load current I_L is sensed and compared with a reference signal I_{REF} representing a desired load current level, to generate a common load current error $I_{REF} - I_L$. The common load current error $I_{REF} - I_L$ is sent to power supply modules PS_1 to PS_N . The output current I_j of the power supply module PS_j is sensed and compared to an average output current I_{AV} and the resulting signal is processed by the compensation circuit M_j to yield the current error signal I_{ej} . The common load current error signal $I_{REF} - I_L$ is processed by the compensation circuit K_j and the resulting signal is added to the current error signal I_{ej} to obtain the reference voltage V_{Rj} for the converter C_j . Again, the converter C_j regulates its output voltage V_j so that the difference $V_{Rj} - B_j V_j$ is approximately zero. The output voltage V_j (processed by the compensation circuit B_j) is also combined with the reference voltage V_{Rj} to provide a regulating signal V_{Cj} to control the converter C_j . By adjusting the gains of the compensation circuit K_j to be relatively large, the load current I_L is approximately equal to the reference current I_{REF} . Therefore, only the reference current I_{REF} need be adjusted to regulate the load current I_L thereby avoiding the manual iterative process of the prior art.

Although the present invention has been described in detail, those skilled in the art should understand that they can make various changes, substitutions and alterations herein without departing from the spirit and scope of the invention in its broadest form.

Claims

1. In a modular power supply having a plurality of module slots capable of receiving power supply modules therein, a system for controlling said power supply modules to regulate an overall output characteristic of said modular power supply, comprising:

an overall control circuit for sensing said overall output characteristic of said modular power

- supply and developing therefrom an overall error signal representing a deviation of said overall output characteristic from a reference characteristic; and
a separate module control circuit for each of said power supply modules, said separate module control circuit sensing an output characteristic of an associated power supply module and developing therefrom and from said overall error signal a regulating signal for said associated power supply module, said regulating signal controlling said output characteristic of said associated power supply module to control said overall output characteristic of said modular power supply.
2. The system as recited in Claim 1 wherein said separate module control circuit senses an output current of said associated power supply module and develops therefrom a current error signal representing a deviation from an average of output currents of said power supply modules, said separate module control circuit combining said current error signal with said overall error signal to further develop said regulating signal.
3. The system as recited in Claim 1 wherein said separate module control circuit senses an actual output current of said associated power supply module and develops therefrom a current error signal representing a deviation of:
- a ratio of said actual output current to a maximum output current of said associated power supply module from
a ratio of an actual output current of said modular power supply to a maximum output current of said modular power supply,
- said separate module control circuit combining said current error signal with said overall error signal to further develop said regulating signal.
4. The system as recited in Claim 1 wherein said separate module control circuit develops said regulating signal from a second characteristic reference signal of said associated power supply module.
5. The system as recited in Claim 1 wherein said separate module control circuit develops said regulating signal directly from said overall output characteristic.
6. The system as recited in Claim 1, further comprising:
- a first sample and hold circuit for receiving and temporarily storing said overall output characteristic, said overall control circuit developing therefrom a sampled overall error signal;
a second sample and hold circuit for receiving and temporarily storing an output current of said associated power supply module, said separate module control circuit developing therefrom a sampled current error signal representing a deviation from an average of output currents of said power supply modules; and
an accumulator, associated with said separate module control circuit, for generating an intermediate regulating signal from said sampled overall error signal and said sampled current error signal.
7. The system as recited in Claim 1, further comprising:
- a first sample and hold circuit for receiving and temporarily storing said overall output characteristic, said overall control circuit developing therefrom a sampled overall error signal;
a second sample and hold circuit for receiving and temporarily storing an actual output current of said associated power supply module, said separate module control circuit developing therefrom a sampled current error signal representing a deviation of:
- a ratio of said actual output current to a maximum output current of said associated power supply module from
a ratio of an actual output current of said modular power supply to a maximum output current of said modular power supply; and
an accumulator, associated with said separate module control circuit, for generating of an intermediate regulating signal from said sampled overall error signal and said sampled current error signal.
8. The system as recited in Claim 1 wherein said overall output characteristic is a function of an output voltage of said modular power supply.
9. The system as recited in Claim 1 wherein said overall output characteristic is a function of an output recurrent of said modular power supply.
10. The system as recited in Claim 1 wherein said each of said power supply modules comprises power conversion circuitry coupled to an output of said modular power supply via an impedance network.

FIG. 1
(PRIOR ART)

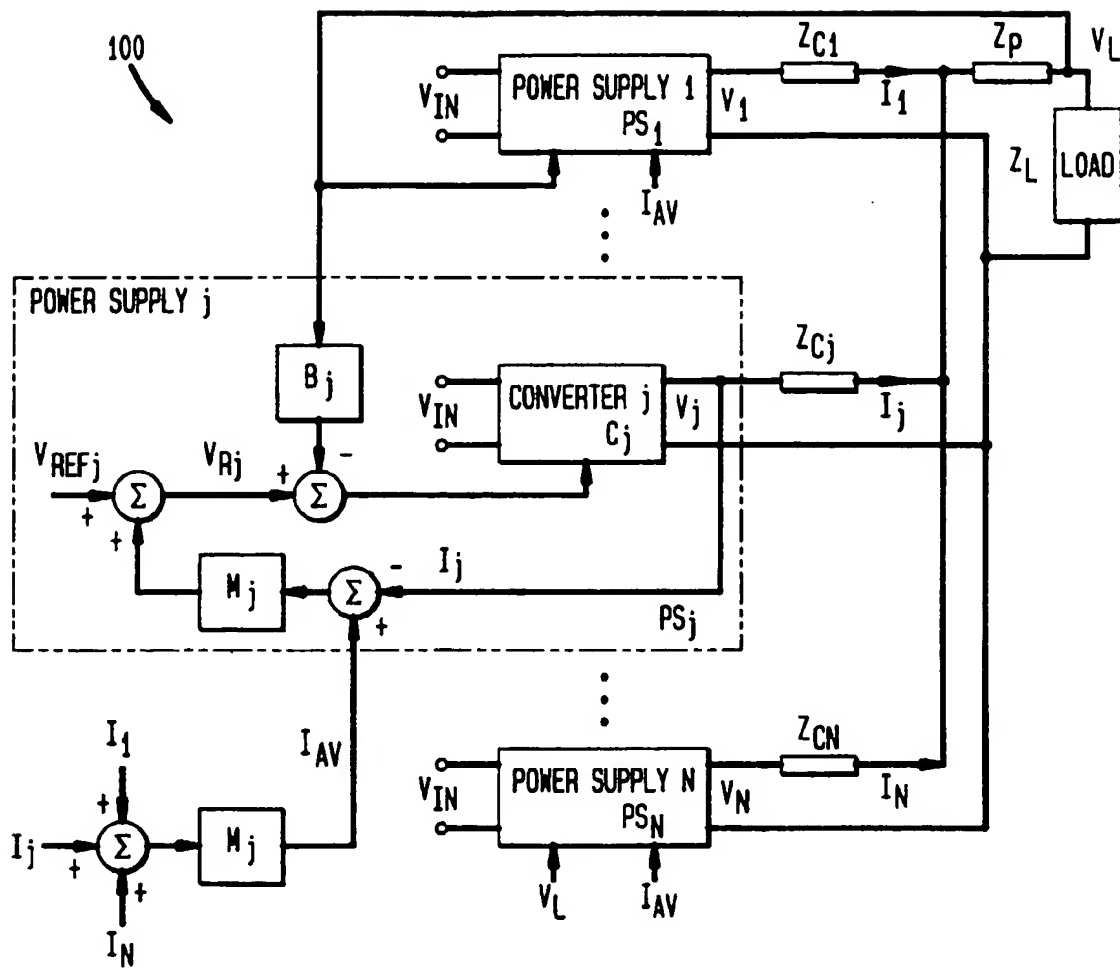


FIG. 2

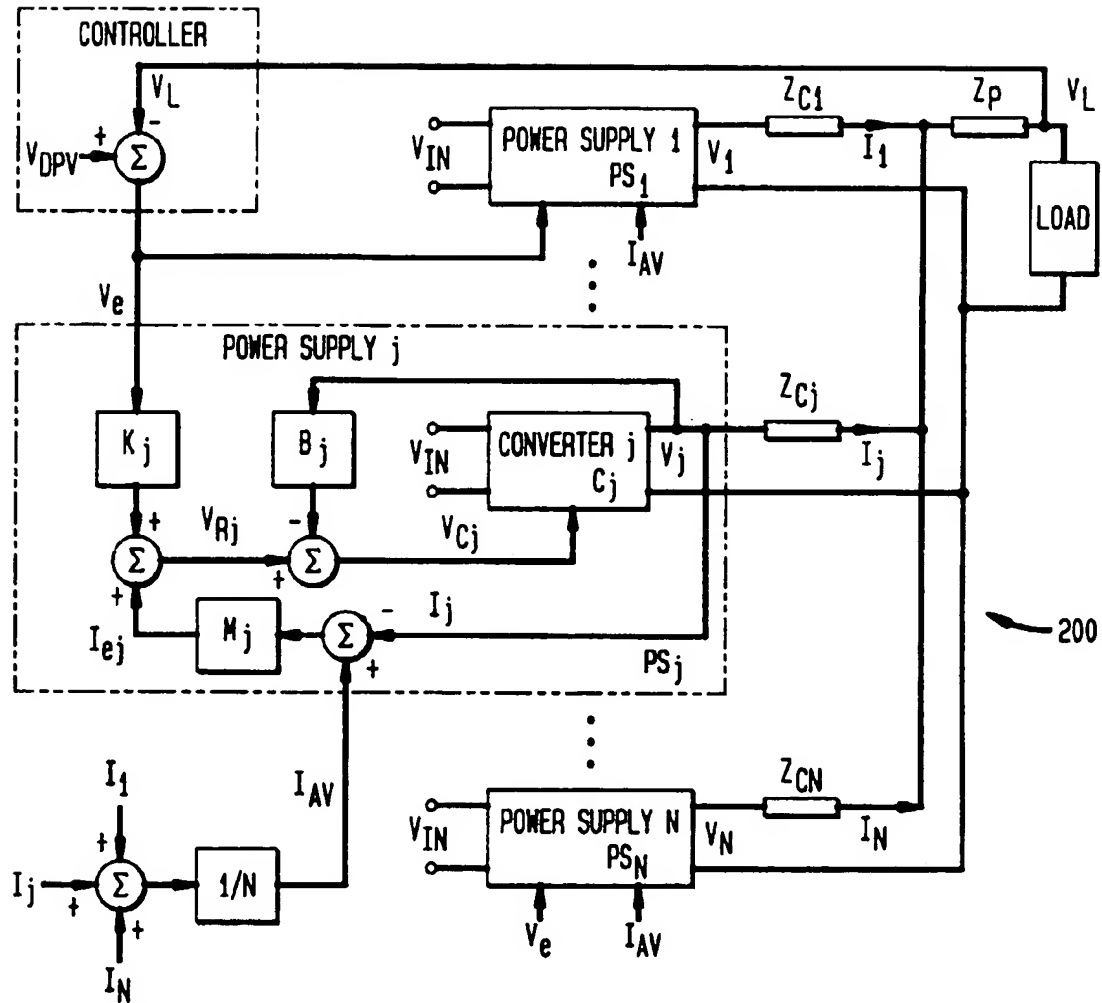


FIG. 3

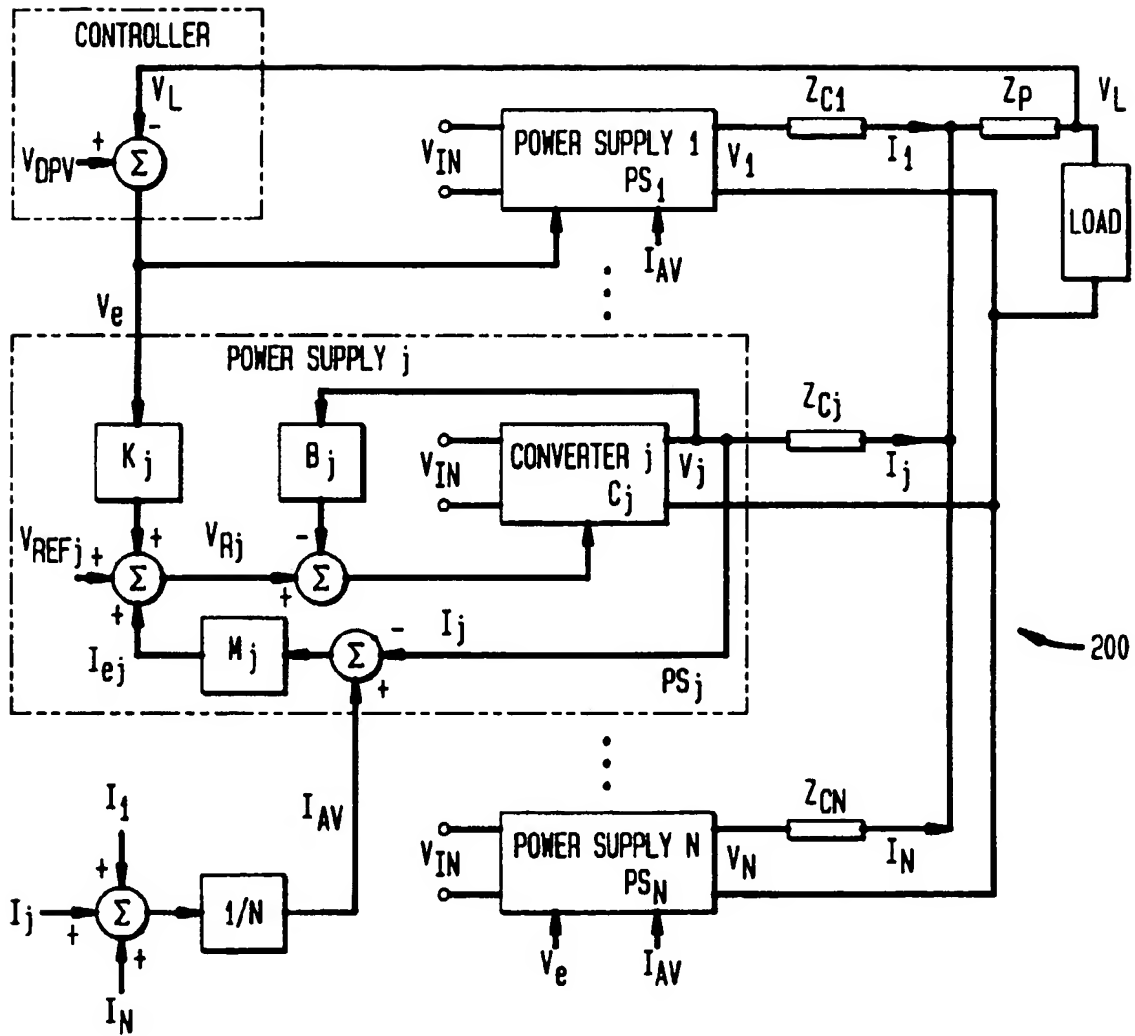


FIG. 4

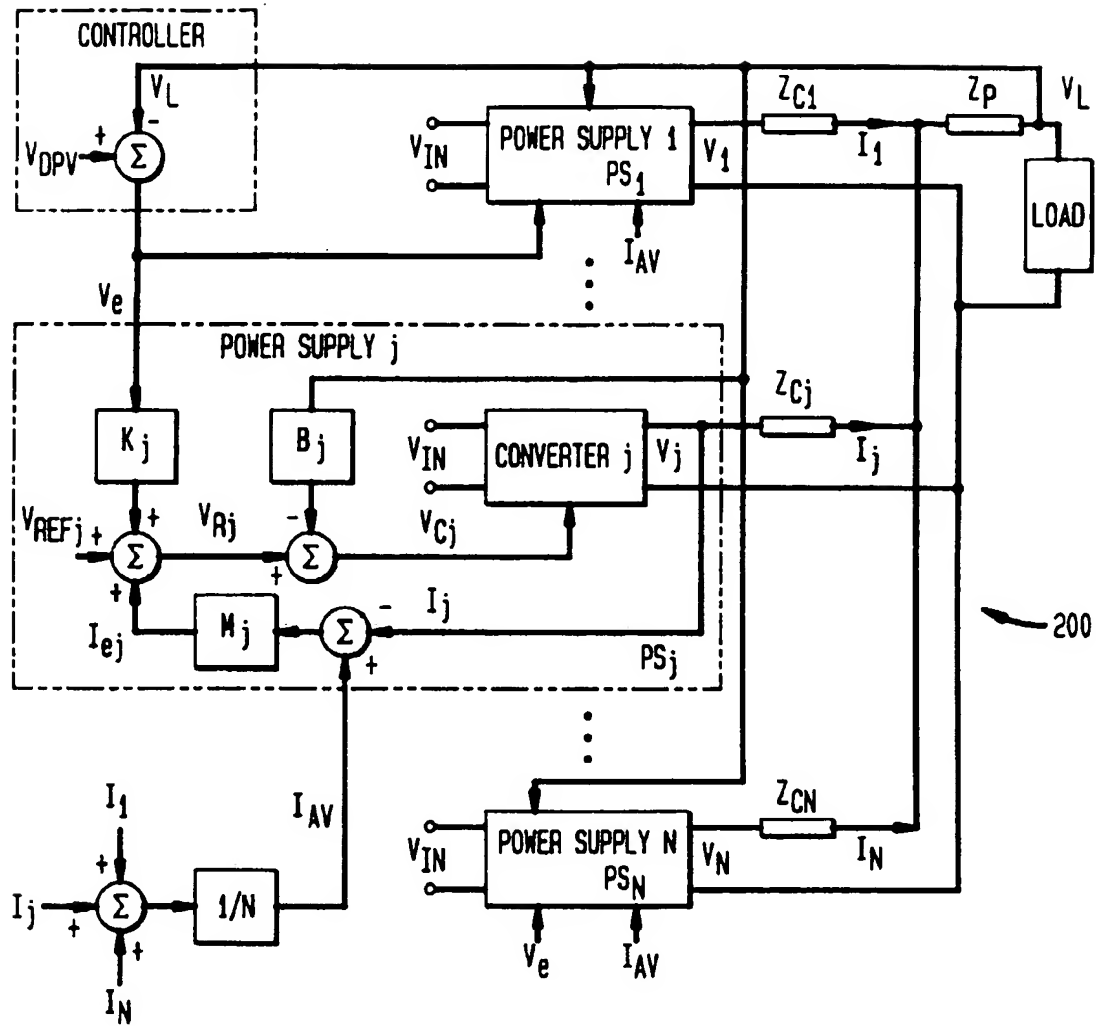


FIG. 5

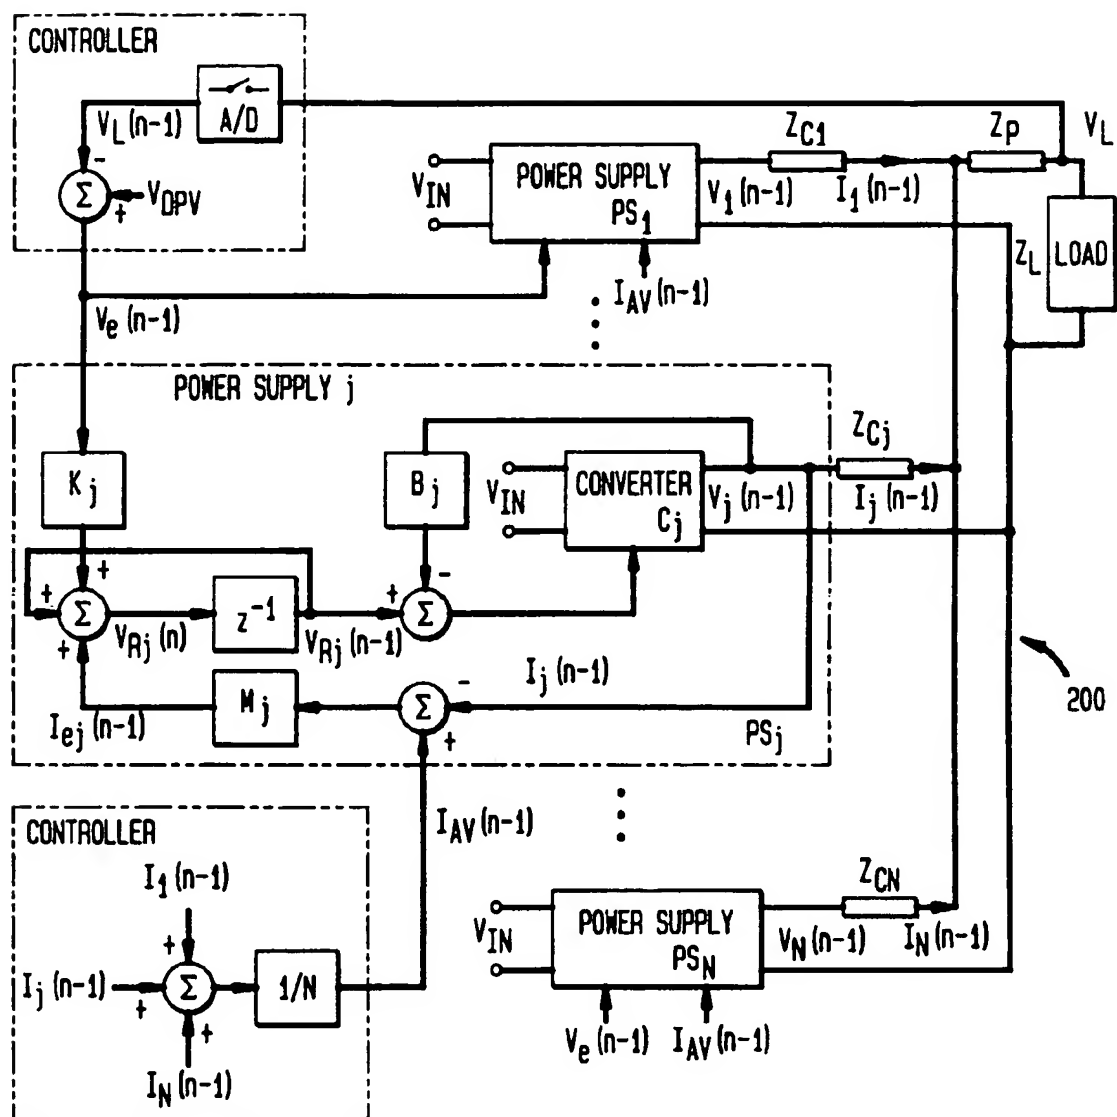


FIG. 6

